



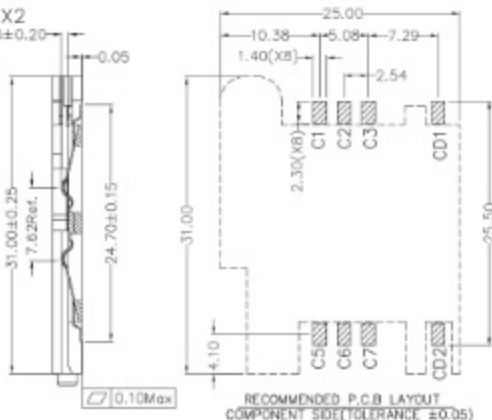


REV.	DESCRIPTION OF REVISIONS	APPR.	DRAWN	RELEASE	DATE
X1	Original revision				
X2		Jimmy			2014.09.13

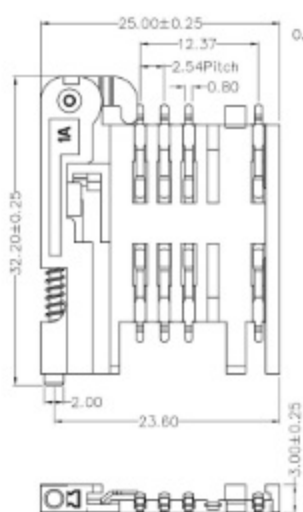

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	OPEN
CARD INSERTED	CLOSED



TECHNICAL CHARACTERISTICS

- General Characteristics
Dimensions: 32.20LX25.00WX3.00H mm
Weight: Approx 1.60±0.20g
Durability: 5,000 cycles min.
- Electrical Characteristics
Contact resistance: 50mΩ typical, 100mΩ max
Insulation resistance: >1000MΩ/500V DC
- Solderability
Vapor phase: 215°C, 30sec. Max
IR reflow: 250°C, 5sec. Max
Manual soldering: 370°C, 3sec. Max
- Environmental Characteristics
Operating temperature: -40°C~+85°C
Operating humidity: 10%~95%RH

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ±0.05)

ITEM	PART NAME	QTY	MATERIAL	FINISH
1	BASE	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	8	Copper Alloy	Contact area: Gold plated
3	HANDLE	1	Hi-temp Thermoplastic	Yellow UL94V-0
4	SPRING	1	SWP	
5	POLE	1	Stainless Steel	
6	AXIS	1	Copper Alloy	Ni plated over all
7	TOGGLE LEVER	1	Stainless Steel	

Unless otherwise specified, other tolerance are:

MA 500030

X	±0.35	X'	±5'	NAME:	SIM Card Connector
X.X	±0.25	X.X'	±4'	MODEL NO:	
X.XX	±0.15	X.XX'	±3'	TYPE:	6pin (without post)
X.XXX	±0.10	X.XXX'	±2'	DRAWN	Zoey Oct.10.2006
PROJ	UNIT	SCALE	DATE	CHECKED	Jimmy Oct.10.2006
	mm	1:1		APPROVAL	Jun Oct.10.2006
CUSTOMER DRAWING				SHEET	1/1
				REVISION	X2